


Max Dynamic Coupling


Drive Components' urethane couplings utilize a split-flex element constructed of a specially formulated polyurethane material that is designed for maximum strength, durability and fatigue resistance. The split-flex element and reversible hubs will reduce inventory and assembly time. Offering parallel, angular and axial misalignment, our torsionally soft element cushions shock loads and vibration resulting in extended equipment life.



Misalignment Capabilities

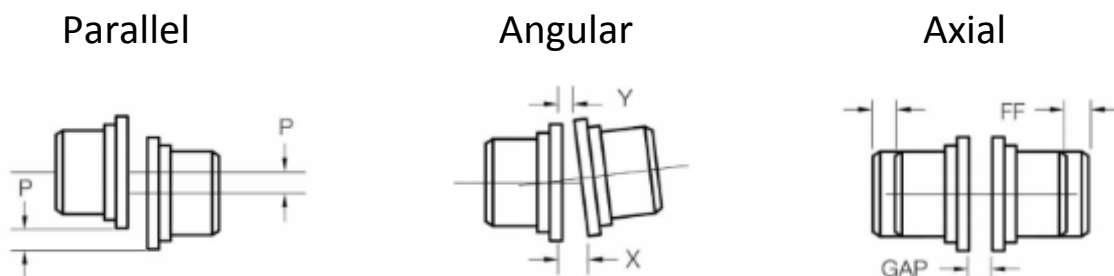

Standard Type

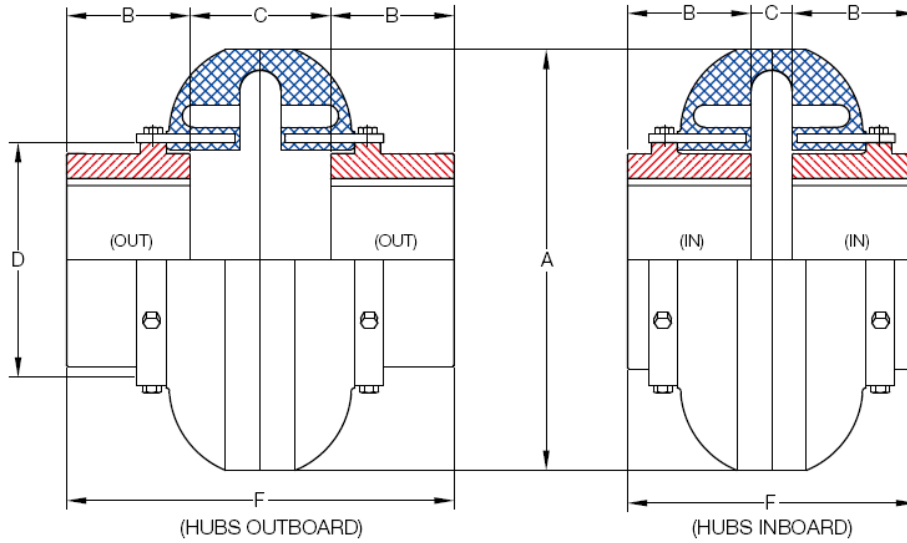

Max Dynamic

Size	Torque Rating (lbs-in)	Allow Speed (rpm)	Coupling Weight	Dimensions (in)						
				A	B	C (Gap)		D	F	
						In	Out		In	Out
2	190	7,500	1.2	3.50	0.94	1.38	1.85	1.85	3.27	3.74
3	365	7,500	2.4	4.02	1.46	0.35	1.85	2.32	3.27	4.76
4	549	7,500	3.1	4.57	1.46	0.35	1.85	2.60	3.27	4.76
5	925	7,500	5.5	5.39	1.77	0.39	2.05	3.15	3.94	5.59
10	1,450	7,500	8.1	6.38	1.77	0.43	2.09	3.66	3.98	5.63
20	2,301	6,600	13.0	7.24	1.97	0.59	2.48	4.49	4.53	6.42
30	3,646	5,800	21.1	8.27	2.20	0.47	2.68	5.43	4.88	7.09
40	5,505	5,000	35.0	9.49	2.40	0.47	2.91	6.61	5.28	7.72
50	7,646	4,200	53.9	10.98	2.72	0.47	3.39	8.15	5.91	8.82
60	12,496	3,800	72.2	12.52	3.15	0.43	3.90	8.74	6.73	10.20
70	22,001	3,600	85.8	14.02	3.35	0.71	4.29	9.25	7.44	11.06
80	39,489	2,000	169.4	15.98	4.49	0.67	5.79	11.26	9.65	14.84
100	85,004	1,900	244.2	20.98	5.51	1.73	3.74	14.13	12.76	14.76
120	170,106	1,800	424.6	25.00	5.98	2.24	4.88	17.64	14.25	16.89

Stocking Warehouse Location

19579 Progress Drive - Suite A Strongsville, Ohio 44149

Phone: (440) 234-6200 • Fax: (440) 234-1200 • Email: sales@drivecomponentsllc.com